




US M7N

Mechanical seals | Mechanical seals for pumps | Pusher seals

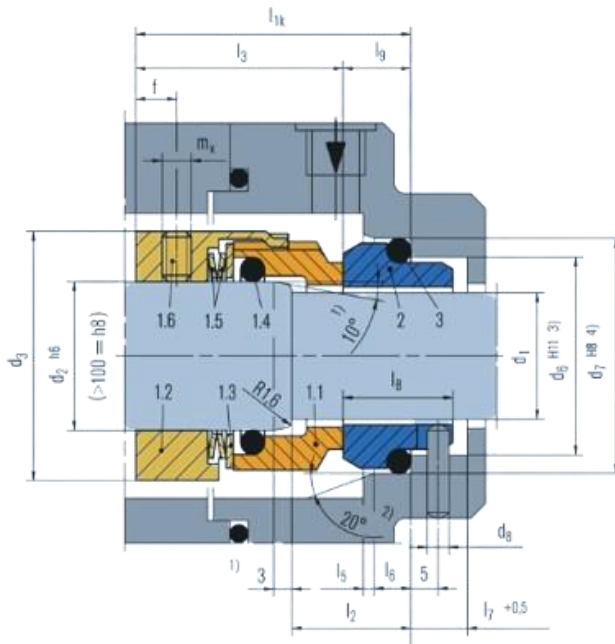

Item	Description
1.1	Seal face
1.2	Drive collar
1.3	Thrust ring
1.4	O-Ring
1.5	Spring
1.6	Set screw
2	Seat
3	O-Ring





Dimensions (in mm):

d	d2	d3	d6	d7	d8	d24	d21	d22	d5	l1	l1N	l2	l3	l5	l6	l7	l8	l9	l39	l40	A	b	e	f	h1	h2	k	m	x	u _{max.}	t
20*	24	39	29.0	35.0	3	26	-	-	44	45.0	60	20	33.5	2.0	5	9.0	19.5	11.5	-	-	-	6	-	5.5	-	-	-	M5	9	1.5	
22*	26	41	31.0	37.0	3	28	-	-	45	45.0	60	20	33.5	2.0	5	9.0	19.5	11.5	-	-	-	6	-	8.0	-	-	-	M5	9	1.5	
24*	28	43	33.0	39.0	3	30	-	-	47	47.5	60	20	36.0	2.0	5	9.0	19.5	11.5	-	-	-	6	-	5.5	-	-	-	M6	9	1.5	
25*	30	45	34.0	40.0	3	32	-	-	49	47.5	60	20	36.0	2.0	5	9.0	19.5	11.5	-	-	-	6	-	5.5	-	-	-	M6	9	1.5	
28*	33	48	37.0	43.0	3	35	44.65	50.57	51	50.0	65	20	38.5	2.0	5	9.0	19.5	11.5	24.0	8.5	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
30*	35	50	39.0	45.0	3	37	47.83	53.75	54	50.0	65	20	38.5	2.0	5	9.0	19.5	11.5	24.5	9.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
32*	38	55	42.0	48.0	3	40	47.83	53.75	59	50.0	65	20	38.5	2.0	5	9.0	19.5	11.5	24.5	9.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
33*	38	55	42.0	48.0	3	40	47.83	53.75	59	50.0	65	20	38.5	2.0	5	9.0	19.5	11.5	24.5	9.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
35*	40	57	44.0	50.0	3	42	51.00	56.92	61	50.0	65	20	38.5	2.0	5	9.0	19.5	11.5	24.5	9.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
38*	43	60	49.0	56.0	4	45	54.18	60.10	65	52.5	75	23	38.5	2.0	6	9.0	22.0	14.0	26.0	11.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
40*	45	62	51.0	58.0	4	47	60.53	66.45	66	52.5	75	23	38.5	2.0	6	9.0	22.0	14.0	26.0	11.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
43*	48	65	54.0	61.0	4	50	63.70	69.62	69	52.5	75	23	38.5	2.0	6	9.0	22.0	14.0	26.0	11.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
45*	50	67	56.0	63.0	4	52	63.70	69.62	71	52.5	75	23	38.5	2.0	6	9.0	22.0	14.0	26.0	11.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
48*	53	70	59.0	66.0	4	55	66.88	72.80	75	52.5	85	23	38.5	2.0	6	9.0	22.0	14.0	26.0	11.0	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
50*	55	72	62.0	70.0	4	57	70.05	75.97	76	57.5	85	25	42.5	2.5	6	9.0	23.0	15.0	26.5	12.5	24.0	6	8.0	8.0	6.6	22.6	9	M6	12	1.5	
53*	58	79	65.0	73.0	4	60	76.40	82.32	83	57.5	85	25	42.5	2.5	6	9.0	23.0	15.0	26.5	12.5	24.0	8	8.0	9.0	6.6	22.6	9	M8	12	1.9	
55*	60	81	67.0	75.0	4	62	76.40	82.32	85	57.5	85	25	42.5	2.5	6	9.0	23.0	15.0	28.5	12.5	26.0	8	8.0	9.0	6.6	24.6	11	M8	12	1.9	
58*	63	84	70.0	78.0	4	65	79.58	85.50	88	62.5	85	25	47.5	2.5	6	9.0	23.0	15.0	28.5	12.5	26.0	8	8.0	9.0	6.6	24.6	11	M8	15	1.9	
60*	65	86	72.0	80.0	4	67	82.75	88.67	95	62.5	95	25	47.5	2.5	6	9.0	23.0	15.0	28.5	12.5	26.0	8	8.0	9.0	6.6	24.6	11	M8	15	1.9	
63*	68	89	75.0	83.0	4	70	85.93	91.85	93	62.5	95	25	47.5	2.5	6	9.0	23.0	15.0	28.5	12.5	26.0	8	8.0	9.0	6.6	24.6	11	M8	14	1.9	
65*	70	91	77.0	85.0	4	72	85.93	91.85	95	62.5	95	25	47.5	2.5	6	9.0	23.0	15.0	28.5	12.5	26.0	8	8.0	9.0	6.6	24.6	11	M8	15	1.9	
70*	75	99	83.0	92.0	4	77	89.10	95.02	105	70.0	95	28	52.0	2.5	7	9.0	26.0	18.0	30.5	14.5	26.0	8	8.0	10.0	6.6	24.6	11	M8	15	1.9	
75*	80	104	88.0	97.0	4	82	98.63	104.55	109	70.0	105	28	52.0	2.5	7	9.0	26.0	18.0	30.5	14.5	26.0	8	8.0	10.0	6.6	24.6	11	M8	15	1.9	
80*	85	109	95.0	105.0	4	87	101.80	107.72	114	70.0	105	28	51.8	3.0	7	9.0	26.2	18.2	30.2	14.0	26.0	8	8.0	10.0	6.6	24.6	11	M8	15	1.9	
85*	90	114	100.0	110.0	4	92	108.15	114.07	119	75.0	105	28	56.8	3.0	7	9.0	26.2	18.2	30.2	14.0	26.0	10	8.0	10.0	6.6	24.6	11	M8	18	2.3	
90*	95	119	105.0	115.0	4	97	114.50	120.42	124	75.0	105	28	56.8	3.0	7	9.0	26.2	18.2	30.2	14.0	26.0	10	8.0	10.0	6.6	24.6	11	M8	18	2.3	
95*	100	124	110.0	120.0	4	102	117.68	123.60	129	75.0	105	28	57.8	3.0	7	9.0	25.2	17.2	29.2	14.0	26.0	10	8.0	10.0	6.6	24.6	11	M8	18	2.3	
100*	105	129	115.0	125.0	4	107	124.03	129.95	134	75.0	105	28	57.8	3.0	7	9.0	25.2	17.2	29.2	14.0	26.0	10	8.0	10.0	6.6	24.6	11	M8	18	2.3	



